


Thermowells

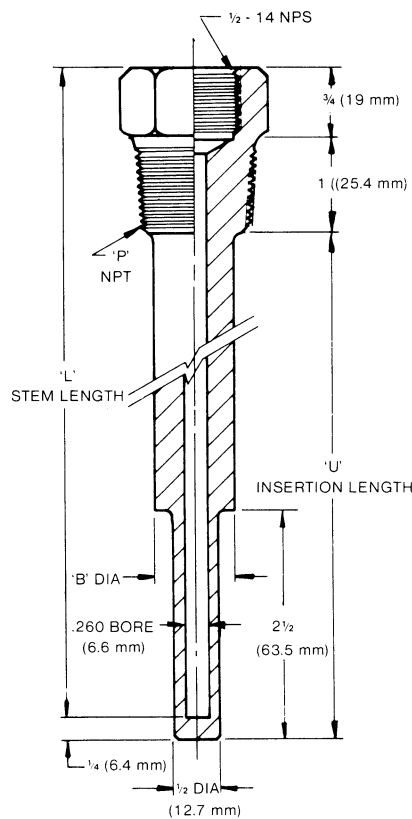

*NOTE

- 1-1/8" Hex Solid Bar stock used for 1/2" NPT & 3/4" NPT Process connection.
- 1-3/8 Hex Solid Bar stock used for 1" NPT Process Connection.
- Plug and Chain available upon request (Optional)

Standard Bore .260ø
316 Stainless Steel

Process Connection "P"	Stem Length "L"		Insertion Length "U"		Diameter "B"		Overall Length O.A.L.	
	In	mm	In	mm	In	mm	In	mm
1/2"-14-NPT	2 1/2	64	1 3/8	35	-	-	2 3/4	70
	4	102	2 1/2	64	-	-	4 1/4	108
	6	152	4 1/2	114	5/8	16	6 1/4	159
	9	229	7 1/2	191	"	"	9 1/4	235
	12	305	10 1/2	267	"	"	12 1/4	311
	15	381	13 1/2	343	"	"	15 1/4	387
	18	457	16 1/2	419	"	"	18 1/4	464
	21	533	19 1/2	495	"	"	21 1/4	540
3/4"-14-NPT	24	610	22 1/2	572	"	"	24 1/4	616
	2 1/2	64	1 3/8	35	-	-	2 3/4	70
	4	102	2 1/2	64	-	-	4 1/4	108
	6	152	4 1/2	114	3/4	19	6 1/4	159
	9	229	7 1/2	191	"	"	9 1/4	235
	12	305	10 1/2	267	"	"	12 1/4	311
	15	381	13 1/2	343	"	"	15 1/4	387
	18	457	16 1/2	419	"	"	18 1/4	464
1-11 1/2-NPT	21	533	19 1/2	495	"	"	21 1/4	540
	24	610	22 1/2	572	"	"	24 1/4	616
	2 1/2	64	1 3/8	35	-	-	2 3/4	70
	4	102	2 1/2	64	-	-	4 1/4	108
	6	152	4 1/2	114	7/8	22	6 1/4	159
	9	229	7 1/2	191	"	"	9 1/4	235
	12	305	10 1/2	267	"	"	12 1/4	311
	15	381	13 1/2	343	"	"	15 1/4	387
1-11 1/2-NPT	18	457	16 1/2	419	"	"	18 1/4	464
	21	533	19 1/2	495	"	"	21 1/4	540
	24	610	22 1/2	572	"	"	24 1/4	616